


# Speed Dome IP PTZ Camera

# HV-IP-PTZ-6650-30X PTZ Camera

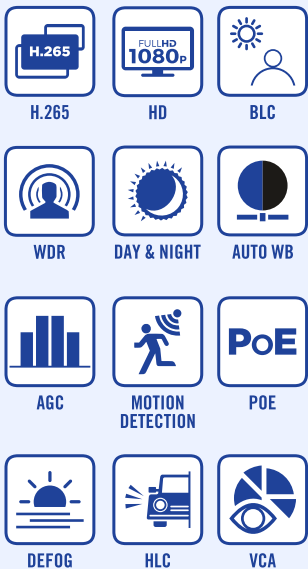

## Features

- ✓ Adopt high performance 1/2.8" SONY.
- ✓ 2.Support dual stream compression technology.
- ✓ 3.Using imported dot matrix large glass lamps and imported high-speed glass lamp light, to ensure the IR distance 150 m; product life can reach 30,000 hours.
- ✓ 4.Intelligent infrared control technology can automatically control the infrared light according to the environment. Under the premise of ensuring monitoring results, it can effectively enhance the infrared lamp's life and ensure the product stability.
- ✓ 5.Constant current circuit design, to ensure stable operation of the infrared light. And it won't reduce the infrared lamps' life which caused by the changing of the power supply.
- ✓ 6.Efficient cooling structure, using physical means heat, which can effectively reduce the temperature of the inside dome camera, to prevent the inner to be fogging, and to ensure the machine's stability.

Specification are subject to change without notice. Hawk Vision is a registered trademark of AAA Security Solutions and its Overseas Subsidiary. All other trademarks belong to their respective owners. ©Copyright 2020 AAA Security Solutions. All rights reserved. Released 10/2020.



# Technical Specification

## HV-IP-PTZ-6650-30X

<b>Model No.</b>	<b>HV-IP-PTZ-6650-30X</b>
<b>Signal model</b>	PAL/NTSC
<b>Image sensor</b>	1/2.8" CMOS
<b>Effective pixel</b>	2592(H) x 1920(V)
<b>Horizontal resolution</b>	5MP
<b>Minimum illumination</b>	Color:0.01Lux,B/W:0.001Lux
<b>S/N ratio</b>	>60dB
<b>Backlight compensation</b>	On/off
<b>White balance</b>	Auto
<b>Electronic shutter</b>	PAL:1/25~1/100000s NTSC:1/30~1/100000s
<b>Focus length</b>	4.7-141mm
<b>Optical focus</b>	30x
<b>Focus system</b>	Auto/Manual
<b>IR distance</b>	150m
<b>IR light control</b>	Intelligent control technology
<b>IR light angle</b>	Infrared zoom matching technology
<b>IR light power</b>	Manual setting
<b>IR on</b>	Day/Night/Auto/Timing
<b>IR life</b>	30000hours
<b>Horizontal range</b>	360°Continuous rotation
<b>Vertical range</b>	-90°~0°
<b>Preset call speed</b>	Max 200°/S
<b>Manual call speed</b>	0.01°~180°/S
<b>Presets</b>	255
<b>Cruise track</b>	8 groups, each group for 16 presets
<b>Patrol track</b>	4 groups, each group record 3 mins
<b>Video compression</b>	H.264 Main Profile encoding ; MJPEG / JPEG Baseline encoding
<b>Audio compression</b>	G.711, G.726
<b>Primary stream</b>	2592 * 1920 25fps
<b>Secondary stream</b>	VGA, QVGA 25fps
<b>Video bit rate</b>	32Kbps-16Mbps continuously adjustable, support CBR / VBR
<b>Network protocol</b>	TCP/IP, UDP, RTP, RTSP, RTCP, HTTP, DNS, DDNS, DHCP, FTP, NTP, PPPOE, SMTP, UPNP
<b>ONVIF support</b>	Support
<b>Cooling Structure</b>	Dustproof structure outside the circle
<b>protection level</b>	IP66
<b>Power supply</b>	DC12V(4A)
<b>Power</b>	35W
<b>Work temperature</b>	-35-65°C

Specification are subject to change without notice. Hawk Vision is a registered trademark of AAA Security Solutions and its Overseas Subsidiary. All other trademarks belong to their respective owners. ©Copyright 2020 AAA Security Solutions. All rights reserved. Released 10/2020.

**AAA SECURITY SOLUTIONS:** 231, 2ND FLOOR KRISHNA MARKET, PITAMPURA, NEW DELHI-110034

**SALES:** 011-47097440 | **SALES EMAIL:** INFO@HAWKVISIONINDIA.COM | **SUPPORT EMAIL:** SUPPORT@HAWKVISIONINDIA.COM